


EU ROOF CORRICOLO

1000 / 32 Roof and Reverse Profiles 5.1
Corricolor 5.3



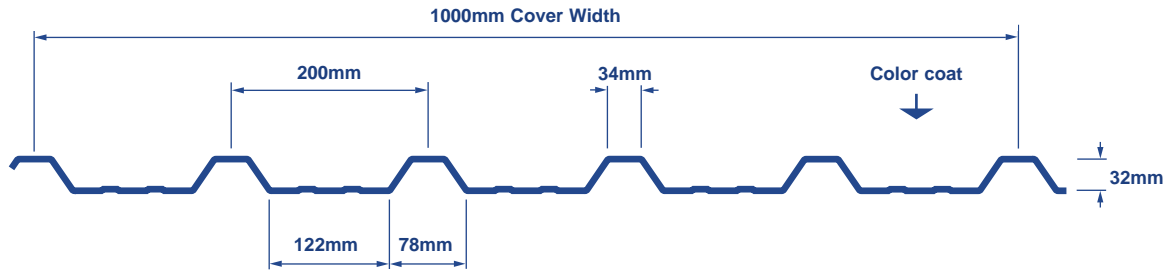

Quality:

Procolor® is a premium quality product manufactured from galvanised coil to **European Standard BS EN 10147 : 1992.**

The substrate is Fe E 220 G with hot dipped galvanised coating of 200 grammes per square metre.

The substrate is primed and 20 micron of Polyester are applied to the external surface.

Heat Resistance:

Maximum continuous temperature -40°C to +80°C.

Profile:

Procolor® is manufactured in a 32mm deep profile with a 200mm pitch in a 1000mm cover width, with mini-ribs. (Mini-Ribs can be omitted if specified at time of order).

Tolerances:

All dimensions are subject to roll forming tolerances.

Thickness:

Procolor® is available in 0.50mm thickness in Roof and Reverse profiles.

Colour:

Procolor® is available in standard colours, Slate Grey and Juniper Green.

Manufacture:

Procolor® is manufactured by EU Profiles Ltd. a Company committed to total quality products.

Storage & Handling:

For advice on storage and handling please consult the leaflet enclosed in each bale of Procolor®.

Accessories:

EU Profiles Ltd. provides a full range of complimentary services and products for their sheeting including Clearlights, Gutters, Trims Flashings and Up-stands.

Full Crimping facilities are available for our 1000/32 Procolor®.

The coil material used to roll-form Procolor® can also be provided in sinusoidal form as Corricolor®. Please contact our Technical Sales Office for details.

